

Pallana Light

IDEO



Practically playful! The Pallana Light by IDEO is a suspended lighting fixture that supports you in the balancing act that is daily life. Pallana's mechanically joined classic shapes create a dynamic and adaptable design, making it a playful task light. Spin the ring lights to assist you when working, eating, cooking, helping your children with homework, or whatever occasion. Pallana Light is available in two muted colours to match any interior style and colour palette. The added softness of the matte textured rings and knitted fabric sets Pallana apart from traditional finish choices. With the dim-to-warm functionality, you can control the colour temperature and light intensity simultaneously! Pallana brings touch of exuberance to any room, while supporting your flow activities and moods throughout the day.

Detailing




Eating, working, cooking. Whatever the occasion or space, Pallana is up to the task.

Colours




Pebble



Slate

Pallana Light / Pallana Light 6

Dimensions

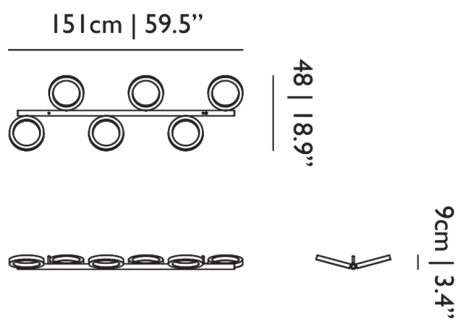

Product

WIDTH 151.5cm | 59.6"
HEIGHT 9.5cm | 3.7"
DEPTH 48.5cm | 19.1"
WEIGHT NETTO 7.5kg | 16.53lbs

Packaging

WIDTH 57cm | 22.4"
HEIGHT 22cm | 8.7"
CUBAGE 0.2m³ | 7.17ft³
LENGTH 162cm | 63.8"
WEIGHT 12.5kg | 27.56lbs

Technical UL / CE

MATERIAL

Metal tube with knitted fabric sleeve, powdercoated aluminium rings & plastic diffusers.

ENERGY LABEL

G

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

6

INPUT VOLTAGE

120-250V

FREQUENCY

50/60

MAX POWER CONSUMPTION

58W

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

1000cm | 393.7"; 250cm | 98.4"

SWITCH

No

CANOPY

Pebble III in matching colour

CHROM X

0.4358

CHROM Y

0.4014

CRI

93

LIGHT OUTPUT

3800 lm

COLOUR TEMPERATURE

3000 K (max)

LIGHT DIRECTION

All directions

R9

71.1

DIMMING & LIGHTING CONTROL

DALI dt6, Push / Pulse dim on Line Voltage, Wireless
Wall Switch (dimmer), Mains / ELV dimming is not
possible, Dim to Warm

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

DALI dt6

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Push / Pulse dim on Line Voltage

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for use with line voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Wireless Wall Switch (dimmer)

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The wall switch can be integrated in System 55 or Decora style wall switches. The Wireless Wall Switch communicates via Bluetooth with the radio device in the luminaires canopy. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Mains / ELV dimming is not possible

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Dim to Warm

3000k - 2100k Dim to Warm

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE
